



Panasonic
ideas for life

PERSONAL DOCUMENT SCANNER **KV-S1015C**

- 20ppm / 40ipm High-Speed Scanning
- 50 Page Automatic Document Feeder
- Plastic Card & Business Card Scanning
- 3 Customizable Single-Touch Scan Keys
- Ultrasonic Double-Feed Detection
- Cloud Connectivity (Evernote®, Google Drive™)
- Presto!® PageManager® 9 & Presto! BizCard® 6
- Image Capture Plus Software
- 3-Year Advance Exchange Warranty

Cloud connectivity, rock solid scanning capability.

The Panasonic KV-S1015C scanner is the quick and easy way to transform your paper documents to high-quality digital files, allowing you to manage, send or upload them to the cloud with just the touch of a button.

Its compact design and intuitive operation make the KV-S1015C a perfect fit for small to medium size businesses, offering users straightforward set-up, innovative functionality and a host of advanced features. Like a cutting-edge paper feed mechanism equipped with Ultrasonic Double-Feed Detection and an Active Double-Feed Prevention Roller System that ensures reliable document feeding at an impressive scan speed of up to 20 pages per minute.

Bundled Presto! PageManager 9 software streamlines document management and filing, featuring the ability to convert documents to searchable PDF files while providing access to cloud-based services such as Evernote and Google Drive. Presto! BizCard 6 software helps you organize business cards, with the ability to extract contact data and export it effortlessly to major email clients or Salesforce via “One-Click” synchronization.



1.855.236.8041
panasonic.com/scanners

SOLUTIONS FOR BUSINESS

Easy

Single-Touch Scan Keys

3 customizable preset keys simplify scan tasks. With the touch of a button, instantly start scanning documents and send them automatically to a destination of your choice.



Connected

Cloud Connectivity

Access your documents anywhere on your smartphone, tablet or PC with direct to Evernote & Google Drive scanning!



Reliable

3-Year Advance Exchange Warranty


A standard 3-year warranty with overnight replacement & US-based tech support backs the reliability of our business-grade scanners.



Specifications

SCANNER TYPE	Duplex Sheet Feed Scanning
SCANNER TECHNOLOGY	1-Line CIS (Contact Image Sensor)
SCANNING SPEED*1 (Letter, Portrait)	Up to 20 ppm / 40 ipm (Binary 200 dpi) Up to 20 ppm / 40 ipm (Color 200 dpi)
RESOLUTION (Color and B/W)	Resolution : 100 - 600dpi (1dpi step) Optical : 300/600dpi
AUTOMATIC DETECTION	Ultrasonic Double-Feed Detection
IMAGE COMPRESSION	JPEG (Grayscale/Color)
IMAGE OUTPUT	Binary, Grayscale, Color, MultiStream (Color & Binary or Gray & Binary)
BINARY MODE HALFTONE	Dither, Error Diffusion
IMAGE CONTROL	Automatic Binary/Color Distinction, Multi Color Drop Out, Blank Page Removal, Double Exposure, Smooth Background, Automatic Cropping, De-skewing, Dynamic Threshold, White Level from Paper, Image Emphasis (5 steps), Gamma Correction, Automatic Separation, Noise Reduction, Shadow Removal, Mirror Image, Monochrome Reversing, 2-Page Separation and much more.
OTHER FUNCTIONS	Separation Sheet, Single-Touch Scan Keys
DOCUMENT SIZE (ADF)	Minimum 1.9 in. x 2.8 in. (48 mm x 70 mm) length Maximum 8.5 in. x 100 in. (216 mm x 2,540 mm) length
WEIGHT/THICKNESS*2	Single 11 lbs. - 55 lbs. (40 - 209 g/m ²) Continuous 11 lbs. - 55 lbs. (40 - 209 g/m ²) Card Up to approx. 0.03 in. (0.76 mm) in thickness + embossing (ISO standard 7810 ID-1 card scanning including embossed card)
AUTOMATIC DOCUMENT FEEDER	Up to 50 sheets (20 lbs., 80 g/m ²), 3 hard cards (ISO 7810 ID-1)
SUPPORTED OPERATING SYSTEM	Windows® XP SP3 or later (32-bit), Windows Vista® SP2 or later (32/64-bit), Windows® 7 and Windows® 8 (32/64-bit)
INTERFACE	High-Speed USB 2.0, Up to 480 Mbps transfer rate
POWER REQUIREMENT	AC 100 - 120 V 50/60 Hz, AC 200 - 240 V 50/60 Hz
POWER CONSUMPTION	Scanning mode 17 W or less Idle mode 4.5 W or less Sleep mode 1.6 W or less Power off mode 0.3 W or less
OPERATING ENVIRONMENT	Temperature 50 °F - 95 °F (10 °C - 35 °C) Humidity 20 % RH - 80 % RH
STORAGE ENVIRONMENT	Temperature 32 °F - 104 °F (0 °C - 40 °C) Humidity 10 % RH - 80 % RH
EXTERNAL DIMENSIONS*3 (W x D x H)	11.9 in. x 7 in. x 5.4 in. (303 mm x 177 mm x 137 mm) without Feed tray
WEIGHT*3	5.9 lbs. (2.7 kg)
ACCESSORIES	DVD-ROM : Drivers and Utilities (for Windows®) / User Manuals Driver software ISIS® / TWAIN Application software Image Capture Plus (without OCR), Presto! PageManager 9*4, Presto! BizCard 6*4 Safety Guide, Quick Reference Guide, Mixed batch card guide, AC adapter & Power cord, USB cable
OPTIONS	ROLLER EXCHANGE KIT KV-SS059 (Double-feed prevention roller x 1, Paper feed roller x 1) ROLLER CLEANING PAPER KV-SS03

Dimensions

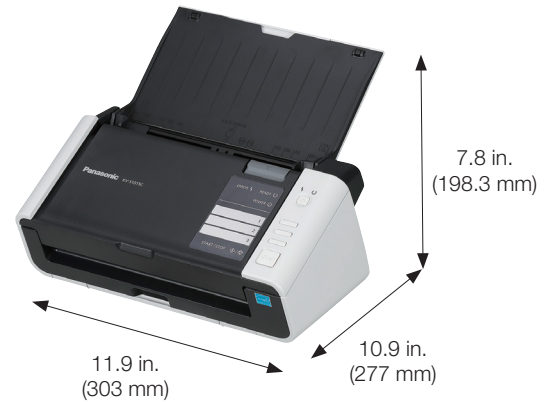

As an ENERGY STAR® partner, Panasonic has determined that this product meets the ENERGY STAR guidelines for energy efficiency.



IMAGE Capture | Plus

Presto! PageManager 9 Presto! BizCard 6

*1 The scanning speed differs depending on the host computer, the operating system, the application, the measuring method, the quantity of data in the image, and the paper type. The scanning speed depends on a measuring method of Panasonic.

*2 "Weight in pounds" of paper represents the weight of 500 (17 x 22 inches / 432 x 559 mm) sheets.

*3 Dimensions and weight are approximate.

*4 Presto! PageManager and Presto! BizCard are either registered trademarks or trademarks of NewSoft Technology Corporation in the United States and/or other countries.

*5 The edition of Presto! PageManager 9 included with this unit is different to the commercially available one.

Trademarks and registered trademarks

- ENERGY STAR and the ENERGY STAR mark are registered U.S. marks.
- ISIS is a registered trademark or trademark of EMC Corporation in the United States and other countries.
- Microsoft, Windows and Windows Vista are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
- EVERNOTE is a registered trademark of Evernote Corporation.
- Google Drive is a trademark of Google Inc.
- All other brand or product names are the property of their respective holders.